



### Microstrip Ferrite Isolator 微带铁氧体隔离器

-For microwave integrate circuit, miniaturization microwave module and radar ,etc.  
-适用于微波集成电路，小型化微波组件，相控阵雷达等微波系统。

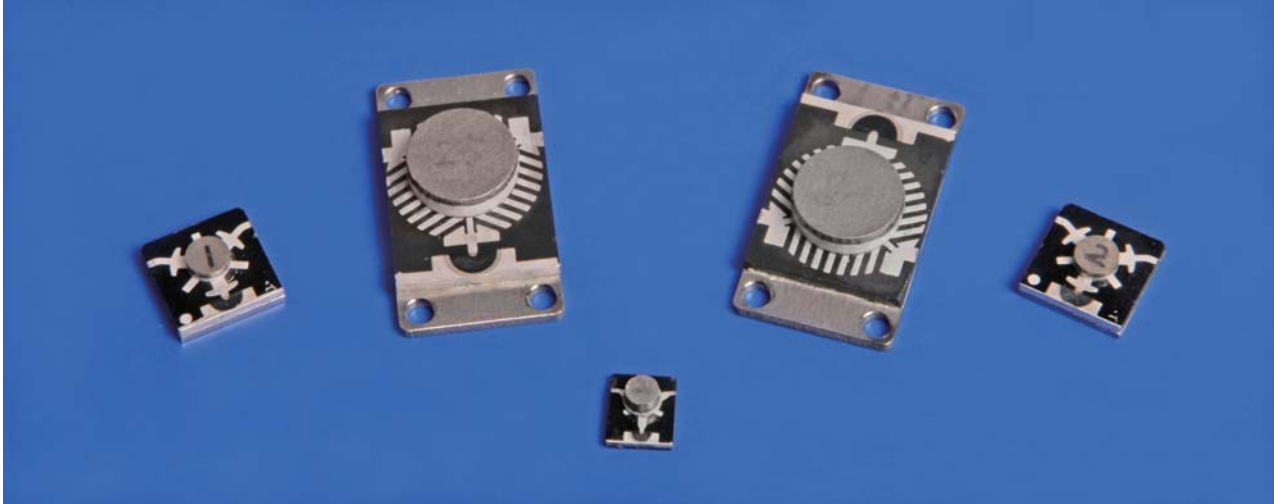

#### Typical Characteristic (波形特性)

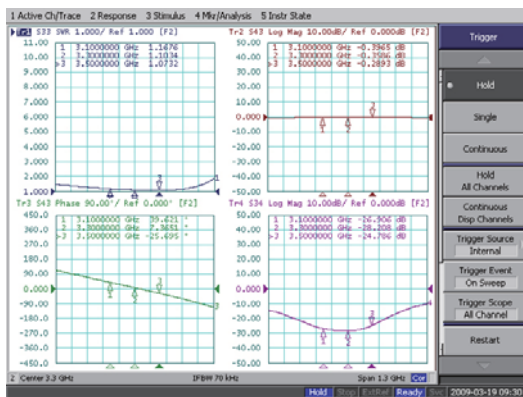


#### FEATURES (特点)

- 尺寸小 Small Size
- 重量轻 Light weight
- 可表贴 SMD Type

#### APPLICATIONS (应用)

- 微波集成电路 microwave integrate circuit
- 小型化微波组件 miniaturization microwave module
- 小型化雷达 Miniaturization radar

#### Dimension(尺寸)

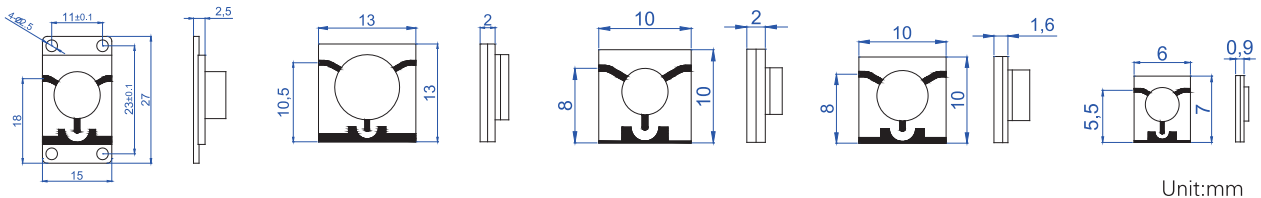

Unit:mm

#### Principal Parameters(主要参数)

Part No. 型号	Frequency range (GHz) 频率范围	Comparatively Band Width 相对带宽	Insertion Loss (dB) max. 插入损耗	Reflux insertion loss(dB) min. 反向损耗	V.S.W.R max. 驻波	Temperature range(°C) 温度范围	Dimension (mm) 尺寸
MIS2835LS10	2.8~3.5	10%	0.5	20	1.20	-20 ~ +65	15 × 27 × 2.5
MIS3857LS15	3.8~5.7	15%	0.5	20	1.25	-30 ~ +70	13 × 13 × 2
MIS4060LS20	4.0~6.0	20%	0.5	20	1.25	-30 ~ +70	13 × 13 × 2
MIS5565LS05	5.5~6.5	5%	0.5	23	1.20	-30 ~ +70	10 × 10 × 2
MIS6080LS15	6.0~8.0	15%	0.5	20	1.25	-30 ~ +70	10 × 10 × 1.5
MIS9011LS10	9~11	10%	0.4	20	1.20	-30 ~ +70	6 × 7 × 1
MIS8012LS20	8~12	20%	0.5	20	1.25	-30 ~ +70	10 × 10 × 1.6

Note: ① Fo available on request. 频率可根据用户要求制造。 ② Other parameters available on request. 其它参数指标可按照用户要求设计